


Base Build-Up

Tree Pits

GeoPaveX Tree Pit packs are designed to provide an attractive permeable paving system using a variety of natural or recycled aggregates.

The GeoPaveX Standard resin binder is mixed with a suitable natural or recycled aggregate with a typical grading of 1/4" to 3/8". (Certain aggregates up to 1" have been used). The aggregate selected must be clean, free of fines, and dry.

The open texture achieved when using the combination of GeoPaveX Standard resin and a suitable aggregate provides a highly permeable surface allowing surface water to drain away and yet still reach the roots.

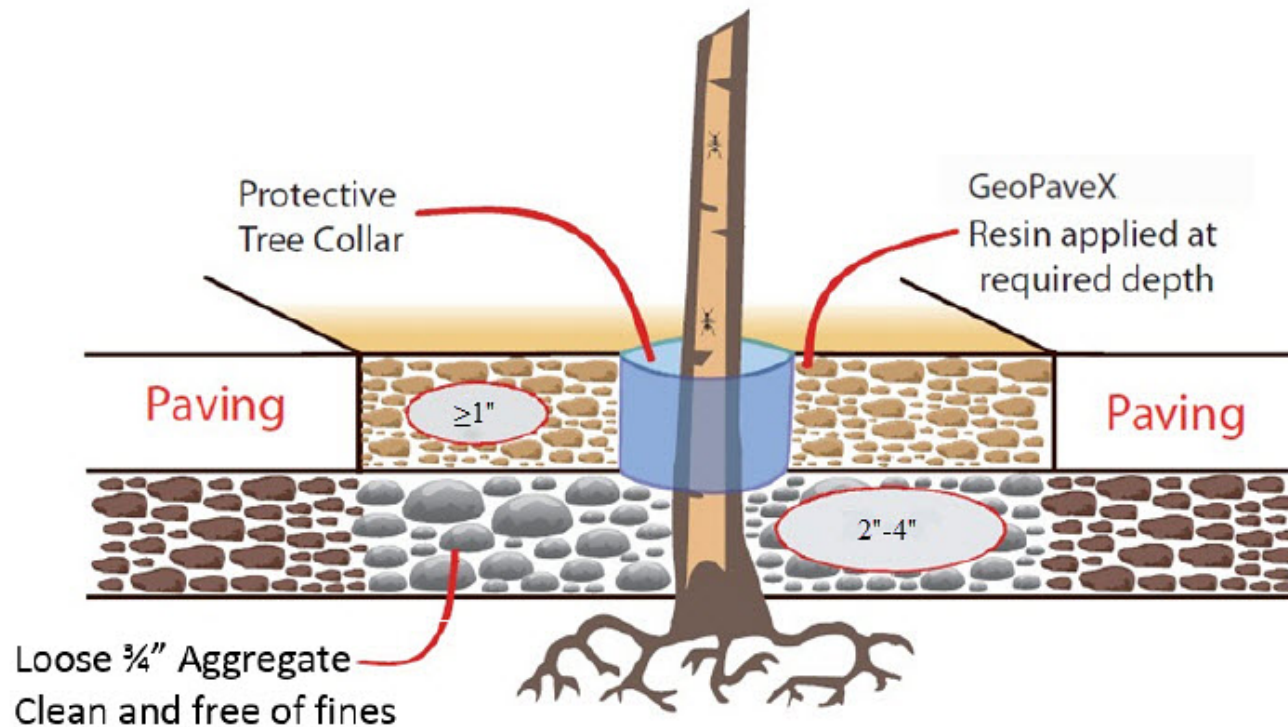

Planting

The tree should be planted and anchored in urban tree soil or similar.

Curb edging and collar detail

A suitable edging material and collar should be installed around the base of the tree and at the edges as required.

Any technical information or advice given by CompleteStreetsUSA is based on laboratory conditions, testing and practical experience. Application techniques and site conditions are beyond our control and we can therefore not be liable for any anomalies that may arise. Base build-up details are intended as a guide only and the information stated does not constitute a specification.